


DRY AGING CABINET

KLIMA MEAT. PREMIER Control, stainless steel

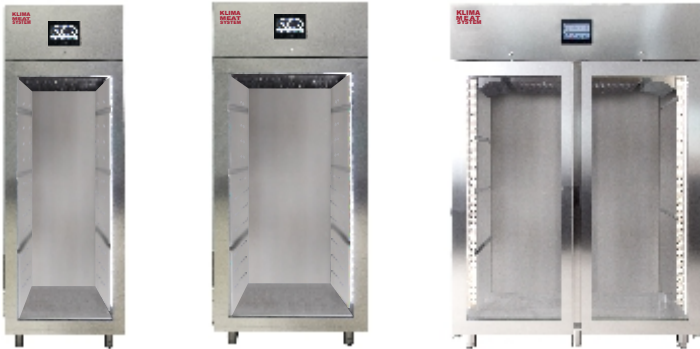

- Built-in humidity generator minimises weight loss to maximise product value and profit
- Pure oxygen generator enhances flavour, preserves colour and improves hygiene
- Patented internal ventilation system ensures every shelf produces consistent, high quality results.
- Temperature, humidity, oxygen and time are tightly controlled through the intuitive touch screen display with 20 preset, customisable recipes

OPERATING TEMPERATURE: 0°C +4°C

MODEL	DIMENSIONS	DESCRIPTION	POWER	CAPACITY KG
KMS700PV	740x850x2115h	Stainless steel cabinet, glass door	1.2 kW	min/max 50/130Kg*
- Includes MEAT KIT 4M70KIT CA - 4 s/steel fridge racks + 4 s/steel rails - Filter kit for humidifier included (warranty void if correct filter not installed and maintained)				
KMS900PV	920x800x2115h	Stainless steel cabinet, glass door	1.2 kW	min/max 60/160Kg*
- Includes MEAT KIT 4M90KIT CA - 4 s/steel fridge racks + 4 s/steel rails - Filter kit for humidifier included (warranty void if correct filter not installed and maintained)				
KMS1500PV	1460x850x2115h	Stainless steel cabinet, glass door	1.5 kW	min/max 100/230Kg* ,
- Includes MEAT KIT 8M150KIT CA - 8 s/steel fridge racks + 8 s/steel rails - Filter kit for humidifier included (warranty void if correct filter not installed and maintained)				

- * Suggested capacity for optimum function.

Standard equipment:

- 7" colour touch screen control with graphics and HD icons for easy programming
- 20 preset and customizable recipes
- Self-diagnostics and test centre function
- Class 5 refrigerant group (2 independent groups on 1500 models) with R290 refrigerant
- Horizontal and vertical air flow (patented)
- Automatic humidity generator
- Humidity and temperature probe
- "Oxygenklima" automatic oxygen sanitiser
- USB port + micro SD
- Datalogger for HACCP record compliance
- Temperature, humidity and electrical power supply alarm management
- Preconfigured for direct discharge of evaporator condensation water
- Preconfigured for direct discharge of condensation water from the humidity generator.
- Filter kit (filter with head, litre counter and water hardness tester).
- **5 YEAR PARTS AND LABOUR WARRANTY**
- **Warranty on humidity generator void if approved filter system not used and maintained correctly.**