



Project \_\_\_\_\_

Item No. \_\_\_\_\_

Quantity \_\_\_\_\_

## FOUR-BURNER RANGE




### FEATURES

- Models available in 14,000 watts (3,500/burner) and 17,000 watts (3,500/front burners, 5,000/back burners)
- Freestanding design with stainless steel housing
- High-quality internal electronics and heavy gauge Litz wire
- Easy-to-clean, high-impact, glass-ceramic cooktop with four separate induction cook zones
- Automatic pan detection allows for instant energy transmission to pan
- LED bar graph displays
- Rotary knobs with 0–10 power settings
- Automatic shut-off feature prohibits overheating
- Integral grease filter and air baffle ensure air intake is cleaner and cooler
- Microprocessor monitors vital components to check for overheating, power supply issues, and more
- Integral fans keep internal components cool
- Available in 200-240 VAC, 3-phase (U.S. and Canada Only)
- One-year field service warranty – U.S. and Canada

### PERFORMANCE



The CookTek® Four-Burner Range is a freestanding, stainless steel design with a high-impact glass-ceramic cooktop intended for back-of-the-house applications in commercial kitchens and restaurants. An automatic shut-off feature, integral cooling fans, and self-diagnosing microprocessor allow for a safe kitchen environment. Precisely control four independent induction cook zones with 0–10 power settings to provide efficient heating of any induction compatible pan.\*

### CERTIFICATIONS

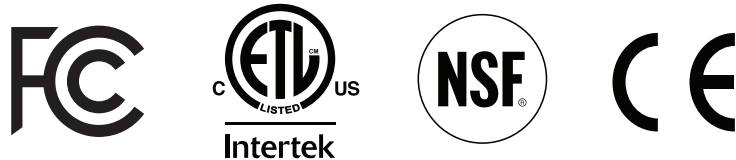

\*Induction cooking requires the use of induction compatible (i.e. magnetic) cookware.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to make substitutions of components or change specifications without prior notice.

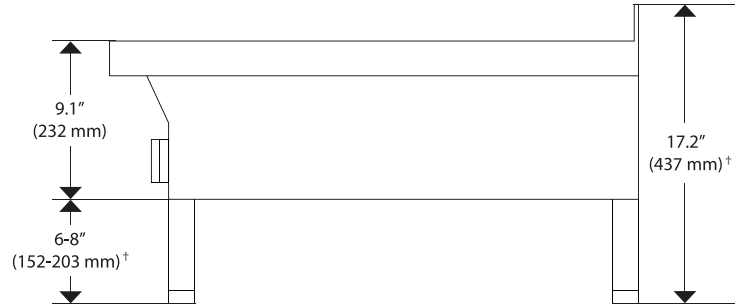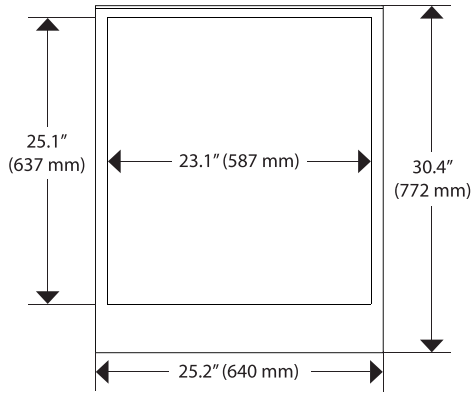

†Feet are adjustable. Height range is 6–8" (152–203 mm).

DIMENSIONS		
Full Unit Height †	17.2"	437 mm
Full Unit Width	25.2"	640 mm
Full Unit Depth	30.4"	772 mm
Cooking Surface Width	23.1"	587 mm
Cooking Surface Depth	25.1"	637 mm
Weight	120 lb.	54.4 kg
CLEARANCE		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm
Below	The space underneath and between the legs should be kept free from obstruction.	
COOLING REQUIREMENTS AND SPECIFICATIONS		
Max Ambient Temperature	122°F	50°C
Internal Cooling Fan Displacement	140 CFM (3.9m <sup>3</sup> /min)	
SHIPPING INFORMATION		
Packaged Height	18"	457 mm
Packaged Width	42"	1067 mm
Packaged Depth	40"	1016 mm
Packaged Weight	150 lb.	68.1 kg
Item Class	250 NMFC #26710	

ELECTRICAL SPECIFICATIONS (3-PHASE)		
UNITED STATES/CANADA ONLY (per burner)		
MC14004-200	645100	200-240 V, 50/60 Hz, 38.9 A, 150–3500 W
MC17004-200	645300	200-240 V, 50/60 Hz, 47.2, 150–3,500 W (front burners), 150–5,000 W (back burners)

Dedicated circuit required for each installation. Cord and plug are NOT INCLUDED.

**Global Operations**  
 2801 Trade Center Drive / Carrollton, Texas 75007 USA  
 US: 800.90TURBO (800.908.8726) / International: +1 214.379.6000  
 Fax: +1 214.379.6073 / www.cooktek.com

**UK & Ireland Distributor**



**MCS Technical Products Ltd**  
 Swindon, SN5 7YT, UK  
 +44 (0)1793 538308  
 sales@mcstechproducts.co.uk  
 www.mcstechproducts.co.uk